



ACQUISITION RESEARCH PROGRAM SPONSORED REPORT SERIES

A New “Availability-Payment” Model for Pricing Performance- Based Logistics Contracts

17 June 2014

Peter Sandborn, Professor

Amir Reza Kashani-Pour, Research Assistant

Xinyuan Zhu, Ph.D. Candidate

Qingbin Cui, Assistant Professor

CALCE Center for Advanced Life Cycle Engineering

University of Maryland

Approved for public release; distribution is unlimited.

Prepared for the Naval Postgraduate School, Monterey, CA 93943.



The research presented in this report was supported by the Acquisition Research Program of the Graduate School of Business & Public Policy at the Naval Postgraduate School.

To request defense acquisition research, to become a research sponsor, or to print additional copies of reports, please contact any of the staff listed on the Acquisition Research Program website (www.acquisitionresearch.net).



ACQUISITION RESEARCH PROGRAM
GRADUATE SCHOOL OF BUSINESS & PUBLIC POLICY
NAVAL POSTGRADUATE SCHOOL

Abstract

This report describes the adoption and extension of “availability payment” concepts currently in use for civil infrastructure Public-Private Partnerships (PPPs) to contract design and pricing for Performance-Based Logistics (PBL) contracts. Availability payment models for civil infrastructure PPPs require the private sector to take responsibility for designing, building, financing, operating and maintaining an asset (most commonly

highways). Under the “availability payment” concept, once the asset is available for use, the private sector begins receiving an annual payment for a contracted number of years based on meeting performance requirements. The challenge in PPPs is to determine a payment plan (amount and length of time) that protects the public interest, i.e., does not overpay the private sector, but also minimizes that risk that the asset will become unsupported. In this report we focus on availability as the key required outcome and introduce a stochastic availability requirement into PBL contract structures.

The model developed in this report uses an affine controller to drive a discrete event simulator (Petri net) that produces availability and cost measures. The model is used to explore the optimum availability assessment window (length of time over which availability should be assessed) for a PBL contract.

Keywords: Public-Private Partnerships (PPPs), contract, pricing, Performance-Based Logistics (PBL)



THIS PAGE INTENTIONALLY LEFT BLANK



Acknowledgments

This material is based in part upon work supported by the Naval Postgraduate School Acquisition Research Program under Grant No. N00244-13-1-0009 and the Office of the Secretary of Defense. The views expressed in this report do not necessarily reflect the official policies of the Naval Postgraduate School nor does mention of trade name, commercial practices, or organizations imply endorsement by the US Government.



THIS PAGE INTENTIONALLY LEFT BLANK



About the Authors

Peter Sandborn is a professor in the Department of Mechanical Engineering and the director of the Maryland Technology Enterprise Institute (Mtech) at the University of Maryland. Dr. Sandborn's research interests include electronic part obsolescence management, prognostics and health management for electronic systems, and system life-cycle and risk economics. He received a PhD degree in electrical engineering from the University of Michigan.

Peter Sandborn
CALCE Center for Advanced Life Cycle Engineering Professor,
Department of Mechanical Engineering
University of Maryland
College Park, MD 20742
Tel: (301) 405-3167
E-mail: sandborn@umd.edu

Amir Reza Kashani-Pour is a future faculty fellow of Clark School of Engineering and PhD student of the Mechanical Engineering Department at the University of Maryland, College Park. His interests include modeling and optimization for high-availability cyber-physical systems, system fault diagnosis and prognosis and production economics. He has an MSc of Electrical Engineering with focus on control theory.

Amir Reza Kashani-Pour
CALCE Center for Advanced Life Cycle Engineering
University of Maryland
College Park, MD 20742
E-mail: kashanipour@gmail.com

Xinyuan Zhu is a PhD candidate of project Management in the Civil Engineering Department at the University of Maryland, College Park. Her research focuses include risk management for renewable energy and energy efficiency projects, contract design for sustainable infrastructure projects, and Public-Private Partnership. She has a master's degree in industrial engineering from Georgia Institute of Technology with a focus on supply chain and network optimization

Xinyuan Zhu
Sustainable Infrastructure Group & Energy Research Center
Department of Civil and Environmental Engineering
University of Maryland
College Park, MD 20742
Tel: (571) 246-3404
Email: zxyemily@umd.edu



Qingbin Cui is an assistant professor of civil engineering at the University of Maryland. He has been working in the field of public private partnership, project procurement and delivery, sustainable materials and infrastructure. He holds a PhD in civil engineering from Purdue University.

Qingbin Cui
Assistant Professor, Department of Civil and Environmental Engineering
University of Maryland
College Park, MD 20742
Tel: (301) 405-8104
E-mail: cui@umd.edu





ACQUISITION RESEARCH PROGRAM SPONSORED REPORT SERIES

A New “Availability-Payment” Model for Pricing Performance- Based Logistics Contracts

17 June 2014

Peter Sandborn, Professor

Amir Reza Kashani-Pour, Research Assistant

Xinyuan Zhu, Ph.D. Candidate

Qingbin Cui, Assistant Professor

CALCE Center for Advanced Life Cycle Engineering

University of Maryland

Disclaimer: The views represented in this report are those of the author and do not reflect the official policy position of the Navy, the Department of Defense, or the federal government.



THIS PAGE INTENTIONALLY LEFT BLANK



Table of Contents

Introduction	1
Public Private Partnerships (PPPs)	3
Comparison of PBL and PPPs	3
Model Development	4
Discrete Event Simulation (DES)	6
Performance Measurement	8
Controller Mechanism (The Ordering/Planning Strategy)	10
Analysis Results	13
Discussion and Conclusions	15
References	17



THIS PAGE INTENTIONALLY LEFT BLANK



List of Figures

Figure 1.	Model Integration Architecture	6
Figure 2.	Petri Net Representation of the System	8
Figure 3.	The Contractor's Performance Measured in Milestones Throughout the Contract Length by Assessing the Performance Over the Operational Time.....	10
Figure 4.	Affine Controller Model for Availability Contract	10
Figure 5.	Affine Mechanism for Availability Contract	11
Figure 6.	Cost Per Year Using Various Time-Assessment Windows in the Controller.....	14
Figure 7.	Variance of Inventory Level.....	14
Figure 8.	Inventory Level vs. Assessment Window Length	16



THIS PAGE INTENTIONALLY LEFT BLANK



List of Tables

Table 1.	Mapping of Availability Payment Contracts to PBL Contracts	5
----------	--	---



THIS PAGE INTENTIONALLY LEFT BLANK



A New “Availability-Payment” Model for Pricing Performance-Based Logistics Contracts

Introduction

Acquisition process efficiency and success across a system’s life cycle requires the development and implementation of best-value, long-term, outcome-based product support strategies that leverage performance-based agreements with both industry and government product support providers (Kobren, 2011). This is reflected in DoD Directive 5000.01, Enclosure 1, Paragraph E1.1.29 that states, “The Program Manager (PM) shall be the single point of accountability for accomplishing program objectives for total life-cycle systems management, including sustainment, survivability, safety, and affordability.

PMs shall consider supportability, life cycle costs, performance, and schedule comparable in making program decisions. Planning for Operation and Support and the estimation of total ownership costs shall begin as early as possible. Supportability, a key component of performance, shall be considered throughout the system life cycle.” Popular vehicles for accomplishing this directive are performance- based product support arrangements.

Performance-based logistics (PBL) and similar mechanisms have become popular for contracting the sustainment of military systems in the United States and Europe. Performance-based logistics (also referred to as performance-based life-cycle product support) refers to a group of strategies for system support that instead of contracting for goods and services, a contractor delivers performance outcomes as defined by performance metric(s) for a system or product (Gansler et al., 2011). PBL thinking is reflected in a famous quote from Theodore Levitt (Levitt, 1972): “The customer really doesn’t want a drilling machine, he wants a hole-in-the-wall.” PBL and similar outcome-based contracts pay for effectiveness (availability, readiness and/or other related performance measures) at a fixed rate, penalize performance shortcomings, and/or award gains beyond target goals. Under PBL, the contractor (system supporter) often commits to providing the current performance level at a lower cost, or an increased performance at a cost similar to that previously achieved under a non-PBL approach.

PBL has become the US DoD’s preferred support strategy for weapons systems. PBL contracts are normally executed at three levels: component-level, subsystem-level, and system or platform -level.



Subsystem-level contracts are the most prevalent form of PBL. In a subsystem-level PBL contract, a contractor is tasked with sustaining a subsystem over a period of 5-10 years – often the subsystem has previously been supported via a non-PBL contract.

Many of today's PBL contracts use what is referred to as public-private partnerships (PPPs). In a subsystem PBL a PPP could mean that the contractor partners with a government owned and staffed maintenance facility. The contractor brings in their best practices and manages the facility, and the contractor is responsible for the outcome. In this work we explore the adaptation of a PPP model from the civil infrastructure discipline for PBL contract pricing. PPPs in the civil infrastructure area (e.g., highway construction and support) have a different structure than those traditionally used in PBL. Civil infrastructure PPPs require the private sector to take responsibility for designing, building, financing, operating and maintaining an asset, which is a much broader view than today's subsystem PBL PPPs in use in the US Department of Defense.

A significant challenge with PBL contracts is to determine the contract requirements and price that protects the public interest, i.e., does not overpay the private sector, but also minimizes that risk that the asset will become unsupported. Subsystem PBL contracts are generally priced based on: 1) estimating how many units will need repair, 2) how much it will cost for each repair, and 3) how the number of units requiring repair and/or the repair cost will decrease over time as a result of design and/or maintenance improvements made by the contractor. If greater than projected improvements are realized the money saved is shared with the contractor according to a schedule negotiated in the contract ("gain share").

Meeting or exceeding target performance may also allow the contractor to add additional years to the contract ("award term"). With subsystem PBL contracts, it is reasonably straightforward for the customer to demonstrate a benefit by determining what it would cost to support the system doing business as usual (no improvements, non-PBL contract) compared to the cost of a PBL contract, e.g., often pre-PBL support and performance experience exists. However, for new system acquisition, where there is no sustainment history; and for platform-level PBL, the PBL contract pricing problem is much more complex and it is unclear how to optimally apply PBL contract mechanisms. For example, a recent study of PBL effectiveness (Boyce and Banghart, 2012), reported on the cost of 21 PBL contracts where in 9 out of 9 component and subsystem-level PBL contracts the cost decreased, but for platform-level (called system-level by Boyce and Banghart) PBL 6 out of 12 contracts resulted in either cost increases or indeterminable cost changes.



Public Private Partnerships (PPPs)

Before addressing how civil infrastructure PPPs can be applied to PBL, we need to briefly describe how PPPs and availability payment mechanisms work in the civil infrastructure world (most commonly for the construction and support of highways). Due to a growing demand for better infrastructure and insufficient federal funds, PPPs are increasingly used in transportation infrastructure development. A PPP in civil infrastructure field can be broadly defined as a long-term agreement between public and private sectors for mutual benefit (USDOT, 2004). This agreement generally defines mutually accepted performance outcomes or results for infrastructure assets rather than providing detailed descriptions of the materials, equipment, and level of workmanship. The practice in the transportation industry shows that the PPP approach enables the public sector to transfer responsibilities and risks that can be efficiently managed by the private sector while retaining the risks that can be better managed by the public sector. The payment mechanisms used in PPP contracts are classified into two categories: toll based approach (user fee) and performance-based non-toll based approach. Tolling allows the private sector to collect tolls and to bear the risk associated with low throughput. In projects where tolling is not a suitable option non-tolling mechanisms, or typically called Availability Payment, can be used.

An Availability Payment mechanism is a performance-based infrastructure procurement where the private sector's reimbursement is coupled to performance specifications. The private sector becomes eligible to receive predetermined payments called Maximum Availability Payments (MAPs) only when the asset is fully operational. If during the operations, the private sector fails to keep the infrastructure available physically or qualitative, appropriate deductions (or penalties) are applied and thus the private sector receives adjusted project payments. An Availability Payment mechanism requires the private sector to perform and comply with the performance standards set in the contract. The performance standards can require the physical availability of the asset (for example: open highway lanes) and the quality of services of the asset (for example, peak hour throughput, adequate lighting, and pavement serviceability).

Comparison of PBL and PPPs

PBL and Availability Payment PPPs share many inherent characteristics. In both cases the public and private sector objectives are aligned towards ensuring better value for the end users/public. These contracts are long term in nature and demand the private sector to play a major role in meeting the objectives of the system or project. The private sector bears the majority of project or system risks and is encouraged to pursue innovative processes and methods. Table 1



summarizes the similarity and difference between these contracts. Although the procurement contracts are operated by different public agencies and targeted on different assets, they all must be well-designed and priced to ensure adequate protection of public interest. In the defense industry, the challenge becomes much greater considering the complexity and uncertainty of defense acquisition programs. While current practices may be effective at the component and subsystem levels, pricing a PBL contract becomes more difficult for a new system acquisition where prior estimates of any kind are unavailable. Therefore, developing and introducing innovative methods and best practices in civil infrastructure PPPs have great potential to significantly improve DoD PBL contract acquisition.

Model Development

This section adapts and extends “availability payment” concepts currently in use for civil infrastructure PPPs to contract design and pricing for PBL contracts. The model development explores and demonstrates the merit of the civil infrastructure PPP approach for platform-level PBL and new acquisition subsystem PBL contracts. We have focused on availability as the key required outcome and introduce a stochastic and layered availability requirement into the proposed civil infrastructure PPP based PBL contract structure.

There are several approaches that can be used to simulate the contractual process along the sustainment work flow. Emulating reality in detail and deriving the optimum strategies are two necessary activities for developing the best contract requirements. Existing methods can be classified into two groups: 1) addressing events within the system (event-based); and 2) the dynamical behavior of the system (time-based)



Table 1. Mapping of Availability Payment Contracts to PBL Contracts

	DoD PBL Contracts	Availability Payment PPP Contracts
Performance	Availability, Reliability, Downtime, Outcome, Variances from Goals	Physical and qualitative availability, Serviceability, Resilience, and others
Incentive	Contractor rewarded for performance exceeding expectations	Typically not used; in some cases, incentives are used for quality materials up to 5% of total construction cost
Penalty	Penalized for not meeting performance criteria and non-availability	Penalized for not meeting performance criteria and non-availability
Pricing	Bidding	Engineer Estimate and Bidding
Value for Money	Benchmarking—compare to non-PBL contracts; Market Research	Value for Money analysis to consider unique characteristics of infrastructure project
Contract Term	Medium to Long-term (5 year base contract followed by a 5 year extension)-- Duration based on regulations	Long-term (Minimum 10 year and maximum 99 years), duration based on the value for money analysis
Renegotiation	Allowed and possible	May be Allowed

Integration of an event-based system with a time-synchronous system for simulation is being pursued in this activity. It should be noted that this area of research is not well developed and there are few existing works on synchronization of time-based and event-based methods. The outcome-based orientation of our problem places more emphasis on selecting the proper time frames to evaluate the performance. Meanwhile the nature of reliability and maintenance actions are generally event based.

The goal of the analysis approach is to maintain the preparedness of the system, which translates into insuring a minimum level of availability at all times. For the support of a fielded system this requires management of parts in such a way as to minimize the backorder and holding (inventory position), which will ideally be close to zero after responding to demands in each period. The model involves the integration of the event-based structure (demand generation) with a time-based controller, Figure 1. The time-based controller uses the historical demand data in equal periods of time to determine new order sizes. Demands are generated by a discrete event simulator that simulates the behavior of the system in time.

As Figure 1 shows, the architecture of the analysis approach is based upon a discrete event retranslation of the process, however the controller only communicates with this model in a time-based regime. Also the performance measurement of the system is a separate activity that considers each simulation path and feeds the controller with a different objective function based on the situation.

The selection of a demand distribution is of great importance. In civil infrastructure (highway management) the demand is selected to represent the



condition of pavement or roads, which generally has a slow dynamic, while for operational purposes systems under PBL contracts consist of parts with a variety of failure rates. Modeling the demand distribution for design purposes has a direct effect on the optimality of the result.

The availability and several cost factors are chosen as the parameters that the controller needs to control. The demand distribution is derived from the reliability of the parts and the controller action orders new parts for replacement. Control action is defined as an affine function¹, in which we are using previous demands to estimate the new order. Making the control action affine makes comparison of different control policies that can be described by affine functions straightforward, e.g., Model Predictive Controller or Greedy Algorithms. These are common methodologies that use demand forecasting for planning future inventory support. The controller builds a model from a number of samples in the past and then predicts the next demand and the analysis window moves forward in time as more information is gathered.

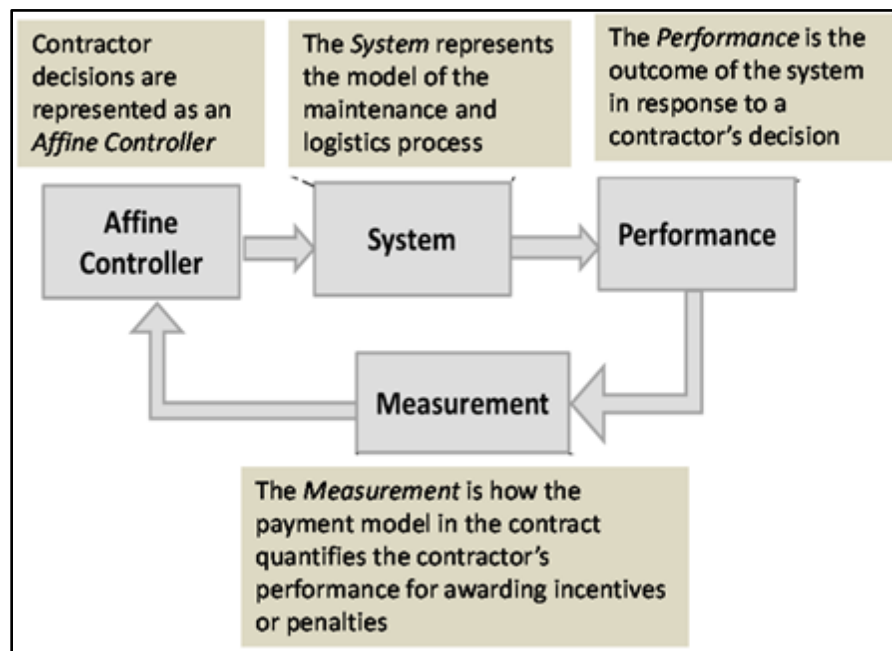


Figure 1. Model Integration Architecture

Discrete Event Simulation (DES)

Because of the complexity and stochastic nature of real world applications, developing mathematical models of the system under study is far from trivial and assessment of their performance is equally difficult. Models that are accurate enough

¹ Affine in the context of nonlinear systems means the control appears linearly (where the nonlinearity with respect to the state is automatically implied).

to adequately represent system behavior often cannot be analyzed using, for example, methods based on the theory of continuous-time Markov chains on a finite or countable infinite state space. DES is capable of representing the timeline of the life of different parts and subsystems with fewer restrictions.

One can add any number of variables and parameters to the model without the need to change the structure of model. DES provides a visual indication of what happens to the fleet and each socket. Most importantly, this model provides a probabilistic sensitivity analysis.

DES has the ability to indicate how a supply chain performs and behaves over time when different rules and policies are applied. Testing different scenarios by adjusting parameters and procedures means that supply chain performance and behavior can be explored.

We use a DES model of the platform including its maintenance and we test the controller performance for the system. The parts in this system go from operational to faulty and then based on the availability requirements at any specific time they will be selected for maintenance or replacement. Also a model of the inventory is provided within the same scheme and different performance measures can be extracted from this model.

Petri nets are a DES approach developed for capturing concurrency and synchronization properties. Petri nets are graphical representations and mathematical tools for formal specification of complex systems (Haas and Shedler, 1986). Formal models like Petri net models have a number of advantages over simply writing simulation codes or DESs. They can be easily and automatically verified for deadlocks, conflict of conditions, catastrophic states, and logical errors in reliability-based design projects (Bertolini et al., 2006).

Figure 2 shows the graphical representation of the maintenance network connected to the inventory and Original Equipment Manufacturer (OEM) used in this report. The input to the Petri net in Figure 2 is the parts inventory (and inventory policies, e.g., reorder threshold, order size, etc.). The net generates maintenance demands via sampling failure distributions for the system's parts and uses the inventory to support the system's maintenance requests. The net produces a time series (and cost) of the system's failure, maintenance, and operation.

The operation of the net is described as follows. After a failure event, if the availability is below the requirement (defined by an operational availability constraint), the part is replaced. This assumes that replacement time is always less than repair time. After replacement, the system will be available immediately, i.e., the inventory lead time is considered in the inventory model. As an order arrives



(caused by a replacement event) a new part from inventory is needed. If the inventory level goes below a certain level, it will be replenished up to a certain level. The inventory is connected to the manufacturer so each delivery from the manufacturer can have a different reliability. After the failure event the part goes for repair if the availability exceeds the required availability (at this instant in time). Downtime of the system increases and a new availability is calculated after repair. Good-as-new repair is assumed throughout the analysis.

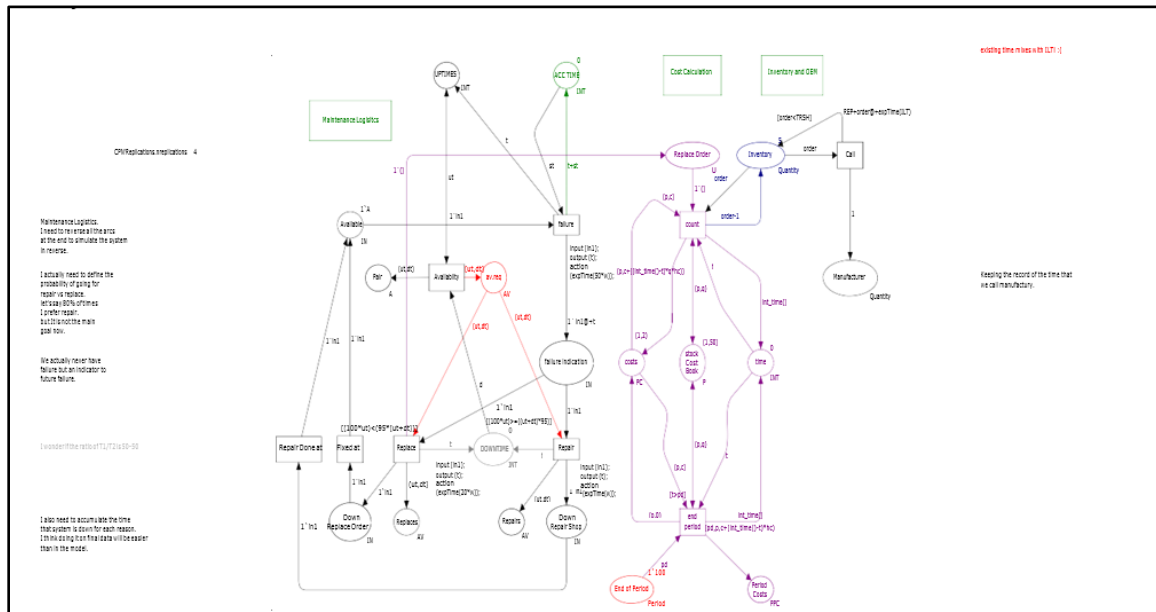


Figure 2. Petri Net Representation of the System

Performance Measurement

The customer's goals can be described by variety of system outcomes or functions of them that we call performance factors. The performance factors are generally defined by the contract terms, and observable contractor decisions (control parameters in the model) or outcomes of the contractor's actions. However, in some cases the customer needs to measure and define secondary functions of these parameters (e.g., operational availability as the ratio of uptime to total operational time, and the ratio of inventory to back-log). Based on the performance factors used by the customer, different measurements and calculations need to be done with the outputs from the DES model (Doerr et al., 2004).²

The availability as a function of uptime and the total operational time is a popular measure of system preparedness. By measuring availability of different

² Note, these functions can increase the complexity to the contractor and can also be "gamed," which means they can be satisfied in ways that do not guarantee the achievement of the performance-based contract

parts and subsystems we can directly determine the availability of the whole systems. This makes the availability the most important factor for measuring performance of contractors to support complex platforms (Cuthbertson and Piotrowicz, 2011). Due to the accumulative nature of availability (how it is accumulated along the timeline), we also need to look for the role of the time assessment window in the measurement system (Figure 3).³ Figure 3 depicts how the total operational time is divided into equal availability assessment windows. As an example, quarterly assessment and bimonthly assessment for a one operational year contract is shown. The on-demand time is the time that the customer actually needs the system and the preparedness or availability of system is critical, whereas the out of demand times are the times that customer does not require the availability of the system. During out of demand times the system may or may not be available, but its unavailability will not count against the hours that the contract requires the contractor to support the system. These are the time periods in which maintenance can be done without damaging availability score (so-called scheduled maintenance periods). The contractor's performance is measured in milestones throughout the contract length by assessing the performance only over the operational time. Longer assessment windows (larger assessment window size) will result in fewer assessments (T) during the contract duration. But, if the time assessment window is too long, then contractor's actions near the end of the window will have little impact on the availability measurement (contractors will be inclined to "drop the ball" late in the window because nothing they do will change the result). Alternatively, if windows are too short, contractors are penalized for the initial condition of the system and the inventory. Alternatively stated, the size of the assessment window will determine the sensitivity of contractor performance actions to different interruptions and eventually affect the contractor's risk-taking attitude.

Optimization of the assessment window size is a primary goal of the model discussed in this report. Also, each availability assessment has an associated customer cost of performing the assessment, i.e., assessing the contractor's performance is not free. This can be administrative cost or the tasks of evaluating the level of availability in more complex parts of the system. For the sake of simplicity, we assumed that regardless of length of the assessment window, the cost of all assessments to the customer are the same.

³ The time assessment window refers to the period of time over which the availability is assessed, e.g., monthly, quarterly, annually, etc.; the model assumes that all assessment windows are the same length.



Controller Mechanism (The Ordering/Planning Strategy)

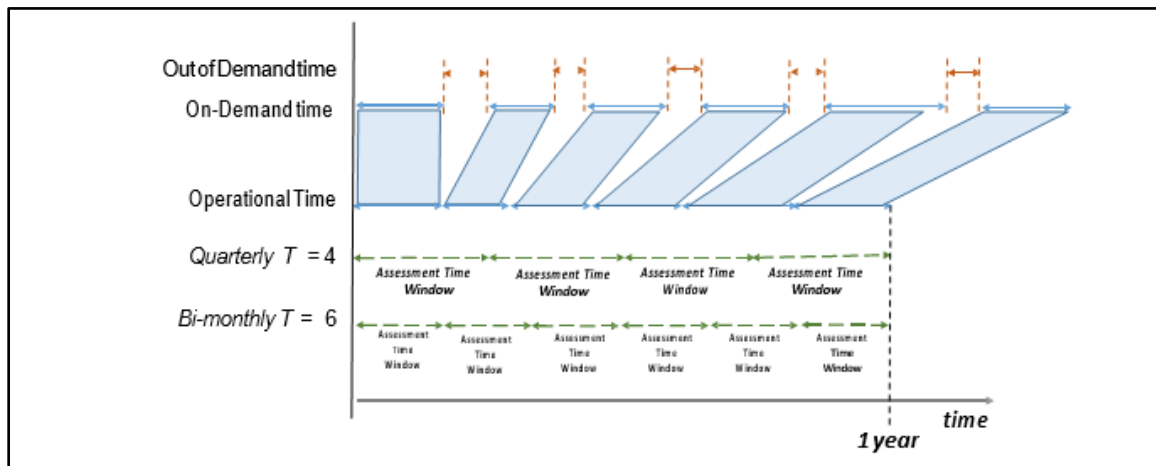


Figure 3. The Contractor's Performance Measured in Milestones Throughout the Contract Length by Assessing the Performance Over the Operational Time

Special attention was paid to exploring the decision making process, and building the corresponding two-level stochastic model. The control-feedback mechanism for availability contracts is based on the established affine control model shown in Figures 4 and 5 (Skaf and Boyd, 2010). The model aims to determine the optimal incentives/disincentives in an availability contract so that the customer can expect the best performance or availability given the long-term budget constraint while the contractor maintains a steady revenue (with profit).

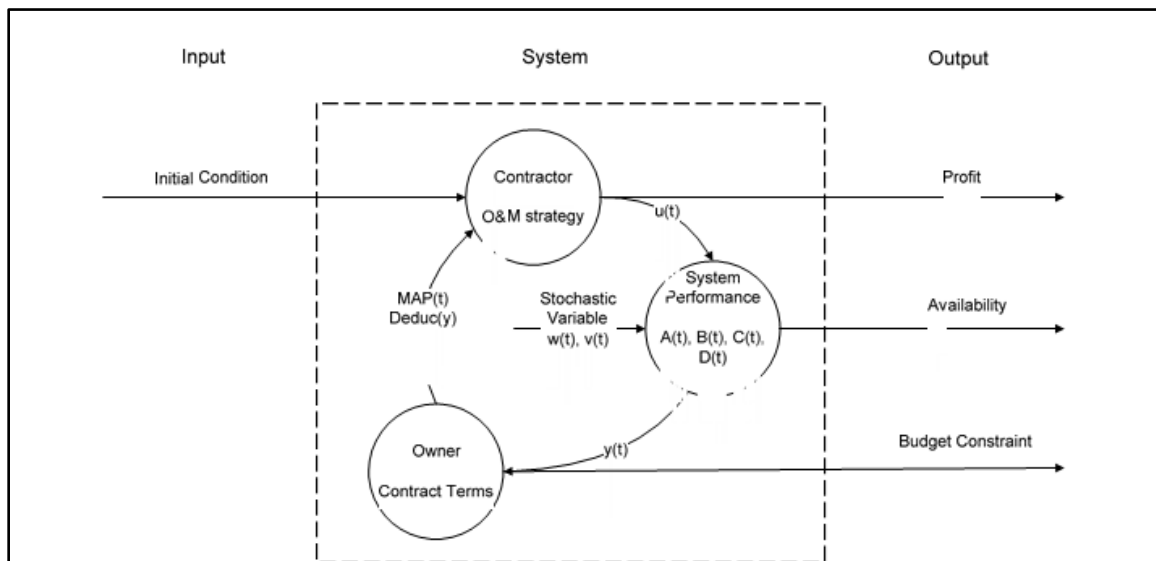


Figure 4. Affine Controller Model for Availability Contract

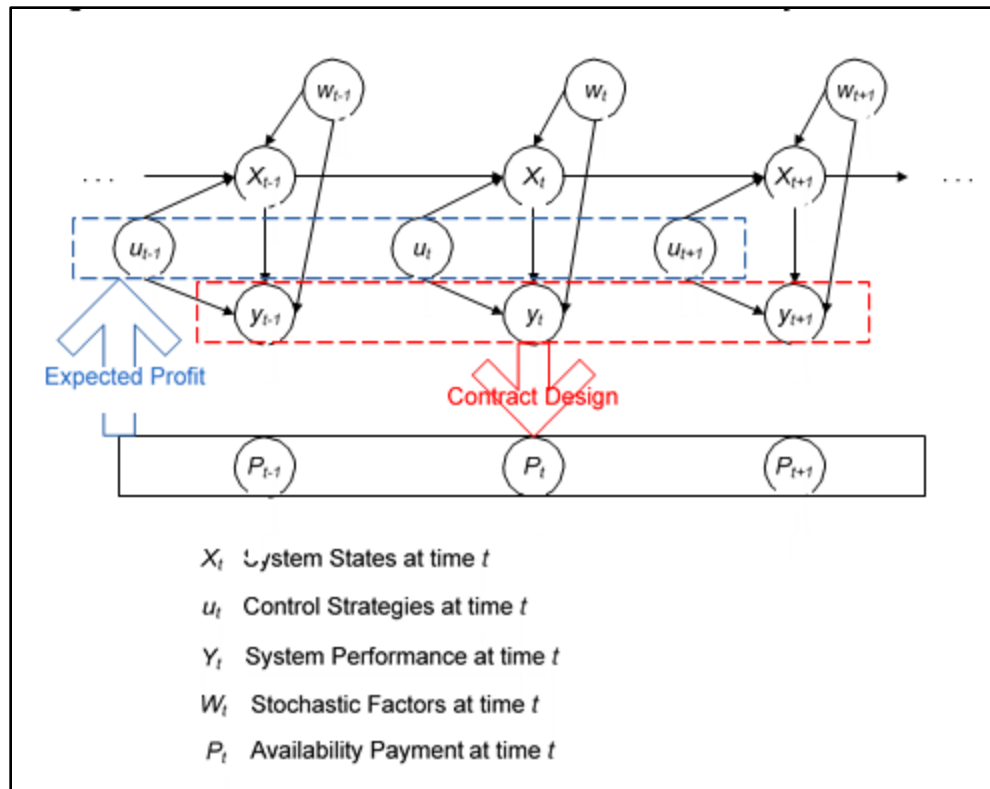


Figure 5. Affine Mechanism for Availability Contract

The purpose of the optimization model is to: a) design the contractual terms, i.e., the Maximum Availability Payment (MAP) and the deductions; and b) simulate the two-layer problem (public request, private react). For the Public Sector we must design a set of Maximum Availability Payments (MAPs), and a deduction function (based on the performance) so as to make sure the project is within budget and incentivize the private sector to provide the best performance. The Private Sector, given the MAPs and the deduction matrix, must decide their strategies throughout the operation phase, such as: quality of the construction, O&M plan, and service quality, so as to maximize their profit and minimize their risk.

The following model describes the general form of the optimization process of an availability-based PPP contract:

$$\max \sum_{t=1}^T y_t^* \quad (1)$$

subject to

$$MAP_t - Deduction(y_t) \leq Budget(t), t = 1, \dots, T$$

Where y_t^* solves problems ($t = 1, \dots, T$),

$$\max \sum_{t=1}^T \left(\frac{E[MAP_t - Deduction(y_t) - Cost_t]}{(1+i)^t} \right) \quad (2)$$

subject to

$$Deduction(y_t) - Cost_t \leq \eta MAP_t, t = 1, \dots, T$$

where y_t is the availability of the project at each time period t (which comes from the DES and must be within the feasible domain for the system model); i is the discount rate (more generally the weighted cost of capital); T is the number of assessments during the contract time;⁴ η is a bankruptcy constraint; and MAP_t and $Deduction(\cdot)$ are decision variables for contract design for the level one (public sector) problem. Given the detailed contract, the private sector (level two) must decide on the best y_t^* for each time t to optimize its overall profit.

In PPP contracts and models, y represents the condition of the road, which comes from a linear model that is accounting for deterioration in terms of disturbance (Sharma et al., 2010). Road deterioration dynamics are captured with linear models and generally have slow dynamics and smooth behavior. PPP contracts are long and the effect of the transient behavior of the system can be ignored. However, PBL contracts for mission critical systems are dealing with systems with non-linear behavior and a variety of internal dynamics. In PBL, systems failures cause discontinuities in the behavior and the deterioration of the system, which come from many different parts whose reliability are modeled in the DES (Petri net).

Design space explorations using a variety of search methods and optimization methods is a common approach in contract-based designs (Nuzzo et al., 2014). In our method every decision or solution needs to be checked for feasibility of physical system realization.

⁴ The operational time during the contract is divided into equal independent periods for performance measurement. At the end of each period (time window), an assessment will be done on the level of performance of the contractor. The outcome in each of these periods will determine the payment.

The first level, the contract design from the public sector's perspective, seeks to maintain the best availability of the system given the long-term budget constraints. The first level problem is solved based on the recourse solution of the second level optimization, which represents the private sector's behavior during the system operation. For the second-level problem, the main objective is to maximize profit, which depends on the operational strategy and contract terms such as the Maximum Availability Payments (MAPs) and deduction adjustments.

Analysis Results

A model that supports contract design negotiations can help both parties to identify the effect of each contract term and requirement on the possible result of the contract (Wijk et al., 2011). Among the stochastic factors that need to be included in this model are the ranges of actions the contractor can take in response to incentives. Also, as previously identified, the availability assessment time window (T) is an important factor. We assumed that the contractor can be modeled by an optimum affine controller. This controller represents the behavior of the decision maker using the historical data and minimizing risk and cost for future assessment windows. It should be noted that the controller we used is proven to be optimum for a given T for such systems (Skaf and Boyd, 2010), however it is not clear what the best T is for providing an overall performance optimum. We assume that if the controller will satisfy the availability requirements the cost is also important to the customer. "Cost" refers to the cost of the inventory (procurement of parts, handling costs, and cost of money).

It has been observed that the contractor is concerned about the risk at each decision instance. So we need to be able to trade-off the optimum T for the customer and the contractor. Intuitively it is more beneficial to the contractor to receive a larger T because: 1) more information is better, 2) less noise effect will be present, and 3) there is more time to compensate for problems. However, the customer wants less variability and more preparedness.



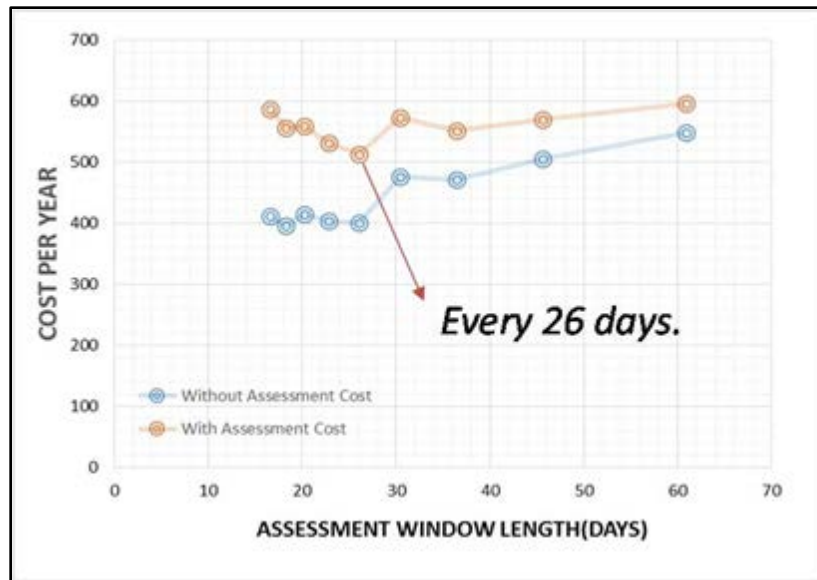


Figure 6. Cost Per Year Using Various Time-Assessment Windows in the Controller

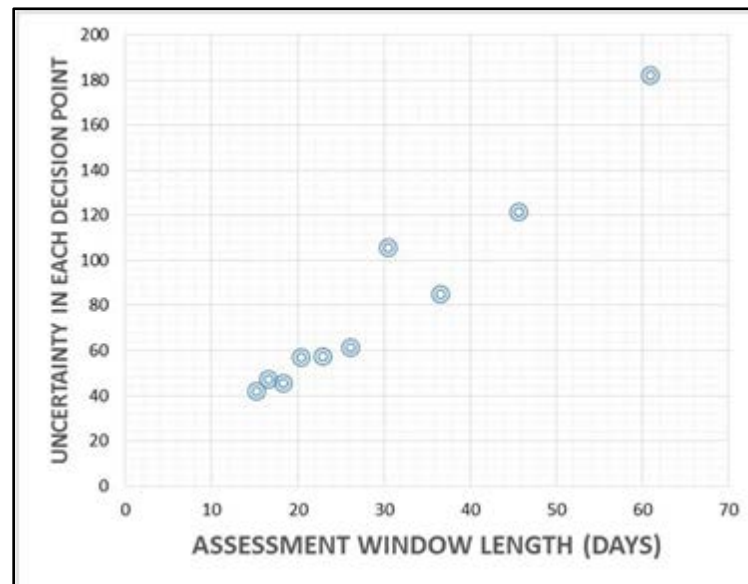


Figure 7. Variance of Inventory Level

In the model described in this report we are using the affine controller to optimize the availability in an indirect way. We can extend the controller to directly target availability, however in practice the most important control variables for contractors for maintaining availability are supply chain, and inventory management and reliability parameters. An availability model can be created as a meta-model based on these control parameters. In our analysis we assumed that reliability (and thereby demand) is not a control parameter, however in reality

PBL is designed to incentivize OEMs to improve their reliability (Guajardo et al., 2012) and the effect could be captured in the model (but is not today).

Figure 6 shows, total cost per period versus the availability assessment window length. The availability assessment window length is related to T by the following,

$$\text{Availability Assessment Window Length} = \frac{\text{Total Operational Hours in the Contract}}{\text{Number of Assessment During Contract (T)}}$$

Using the proposed affine controller scheme for controlling the availability we observed: 1) there is a globally optimum assessment window length for assessing the contractor through the contract length. An assessment window that is larger or smaller than this optimum will not benefit the contractor or the customer. However the cost vs. assessment window length relation (Figure 6) is not symmetrical around the optimum point and adding more time to the assessment window has less effect than reducing the time (i.e., assessing more often).

Figure 7 shows that by increasing the time-assessment window size, the variability in the performance of the controller will decrease, which is due to access to more information that results in better modeling and the effect of sensitivity to small changes in demand. Figure 7 also shows that if the contractor looks at variance as a determining objective, the previous optimum might not be chosen and depending on the risk-taking attitude of contractor or customer the optimum point can be changed. This curve shows that a more regular assessment will result in less variability.

Discussion and Conclusions

In this report we have established a stochastic model that could be used to design the detailed terms in availability contracts; and created a methodology that extends PPP modeling to PBL contract design. Special attention has been paid to exploring the control mechanism between the public and private sector in availability contracts. The methodology combines a dynamic modeling strategy (affine controller) and event-based system (Petri-net model) to capture the complexity of the problem.

The affine-controller mechanism is the key to balance the conflicting objectives of different parties in availability contracts. During the contract period, the private sector tries to maximize their total long-term profit based on the given contract terms and their own sustainment strategies. Alternatively, the public sector is trying to incentivize the private party to maintain the specified performance level.



The model aims to provide guidance for better design and negotiation of availability contracts, and is expected to help both parties understand the essential purpose of the partnership, and seek their mutual interest more efficiently. Specifically the model could be used to find the optimum time windows for assessing the contractor's efforts (i.e., measuring availability) - this is a key factor that determines the constraints for a contractor's design process and requires determining the length of the time window and the starting point for the first assessment. Longer assessment and sampling windows cause more fluctuation to appear in the middle time periods, but the prediction of demand will be more accurate. The length of the assessment window translates directly to the length of time over which availability is measured for contract assessment purposes.

Figure 8 shows the effect of assessment window length on an indirect performance measure (i.e., inventory level). It shows that in all cases of assessment window length, the mean of inventory level is positive and the same, however the variance of inventory level is higher with longer assessment windows. This also shows that with the proper construction of the affine controller, indirect parameters also will be satisfactory. This variance can represent the situation where contractors take higher risk. A risk-averse contractor will prefer a smaller assessment window due to its lower variability.

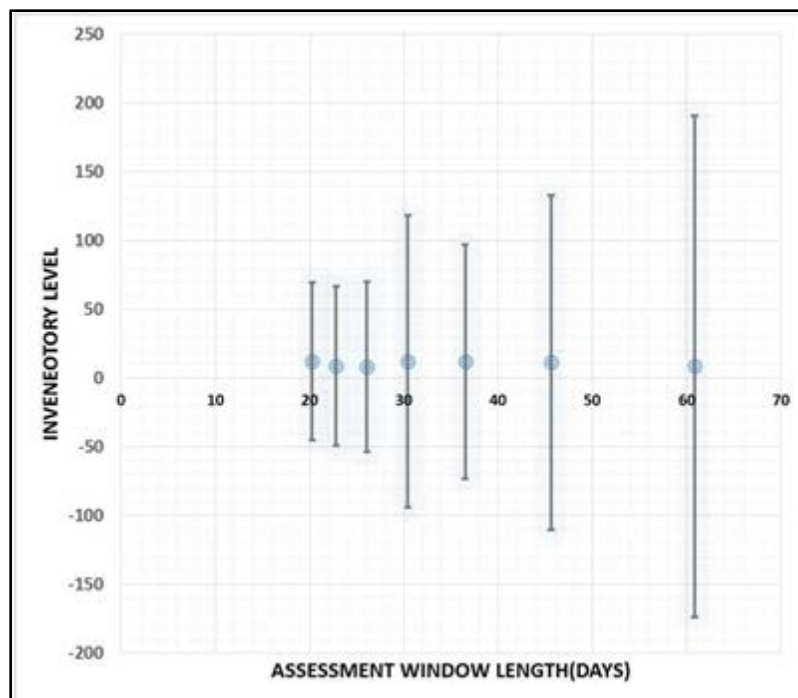


Figure 8. Inventory Level vs. Assessment Window Length

References

- Boyce, J., and Banghart, A. (2012). Performance based logistics and project proof point – A Study in PBL effectiveness. *Defense AT&L: Product Support*, March-April, 26-30.
- Bertolini, M., Bevilacqua, M., and Mason, G. (2006). Reliability design of industrial plants using Petri nets. *Journal of Quality in Maintenance Engineering*, 12(4), 397–411.
- Doerr, K., Eaton, D.R., and Lewis, I.A. (2004). Measurement issues in performance based logistics. DTIC Document, available at: <http://oai.dtic.mil/oai/oai?verb=getRecord&metadataPrefix=html&identifier=ADA498508> (accessed 5 April 2013).
- Cuthbertson, R., and Piotrowicz, W. (2011). Performance measurement systems in supply chains: A framework for contextual analysis. *International Journal of Productivity and Performance Management*, 60(6), 583–602.
- Gansler, J.S., Lucyshyn, W., and Vorhis, C. (2011). Performance-based services acquisition. DTIC Document, available at: <http://oai.dtic.mil/oai/oai?verb=getRecord&metadataPrefix=html&identifier=ADA555375> (accessed 31 March 2014).
- Guajardo, J.A., Cohen, M.A., Kim, S.-H., and Netessine, S. (2012). Impact of performance-based contracting on product reliability: An empirical analysis. *Management Science*, 58(5), 961–979.
- Haas, P.J., and Shedler, G.S. (1986). Regenerative stochastic Petri nets. *Performance Evaluation*, 6(3), 189–204.
- Kobren, B. (2011). Supportability as an affordability enabler: A critical fourth element of acquisition success across the system life cycle. *Defense AT&L: Better Buying Power*, September-October, 50- 54
- Levitt, T. (1972). Production-line approach to service. *Harvard Business Review*, 50(5), 41-52.
- Nuzzo, P., Xu, H., Ozay, N., Finn, J.B., Sangiovanni-Vincentelli, A.L., Murray, R.M., Donze, A., and Seshia, S. (2014). A contract-based methodology for aircraft electric power system design. *IEEE Access*, 2, 1–25.
- Sharma, D.K., Cui, Q., Chen, L., and Lindly, J.K. (2010). Balancing private and public interests in public- private partnership contracts through optimization of equity capital structure. Transportation Research Record: *Journal of the*



Transportation Research Board, 2151(1), 60–66.

Skaf, J., and Boyd, S.P. (2010). Design of affine controllers via convex optimization. *IEEE Transactions on Automatic Control*, 55(11), 2476–2487.

Sodhi, M., Jester, B., Ferguson, J., and Bussiere, M. (2010). A Simulation Model for Setting Terms for Performance Based Contract Terms. Retrieved from <http://oai.dtic.mil/oai/oai?verb=getRecord&metadataPrefix=html&identifier=ADA530123>

Wijk, O., Olinger, T., and Hell, R. (2011). Simulation as support for decision making in negotiations. In: Proceedings of the 14th annual System Engineering Conference, San Diego, USA. Available at: www.systecon.se/documents/Simulation_as_support.pdf.

USDOT (2004). *Report to Congress on Public–Private Partnerships*. U.S. Department of Transportation, December.





ACQUISITION RESEARCH PROGRAM
GRADUATE SCHOOL OF BUSINESS & PUBLIC POLICY
NAVAL POSTGRADUATE SCHOOL
555 DYER ROAD, INGERSOLL HALL
MONTEREY, CA 93943

www.acquisitionresearch.net